MODEL 802/30-9 MEDIUM DUTY TRAILER MAST DATA SHEET

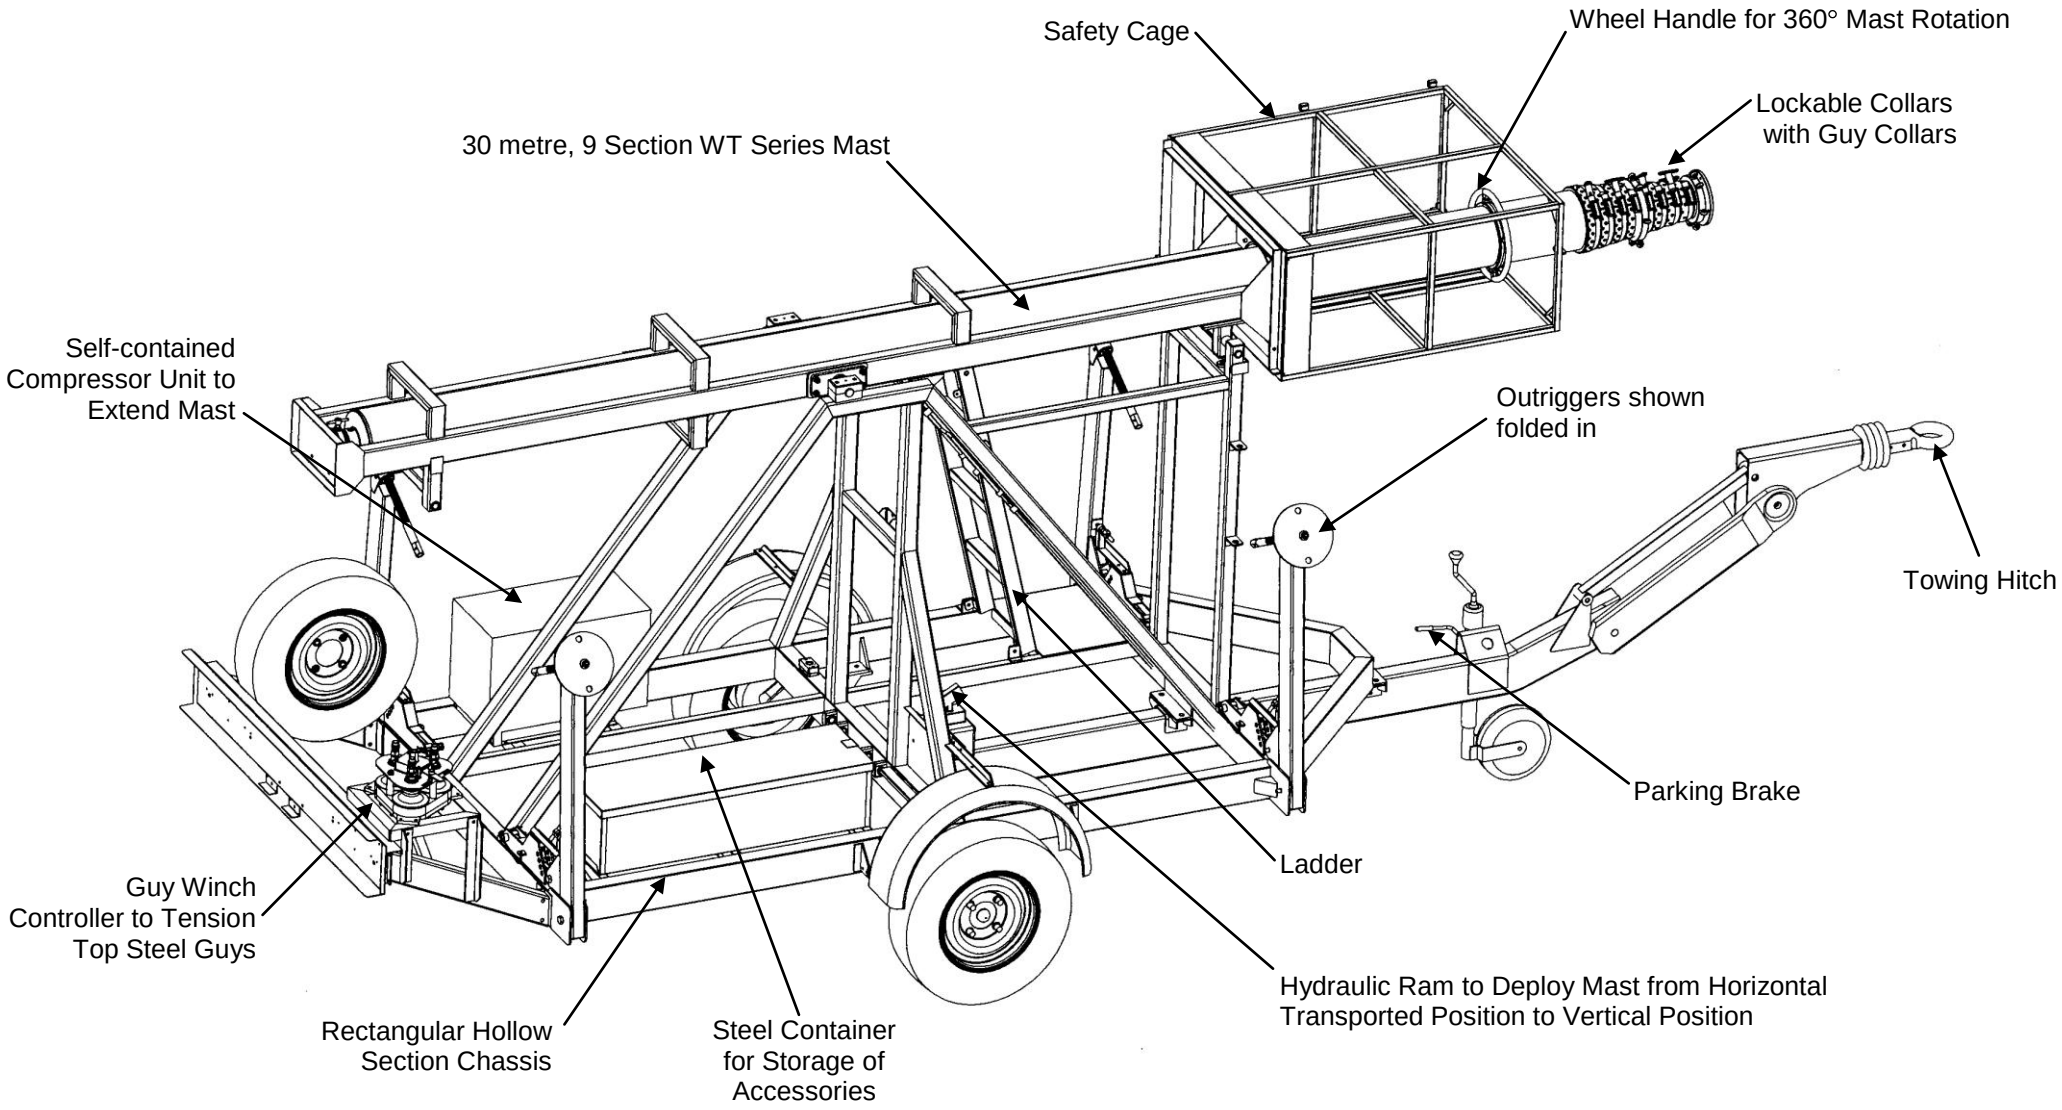

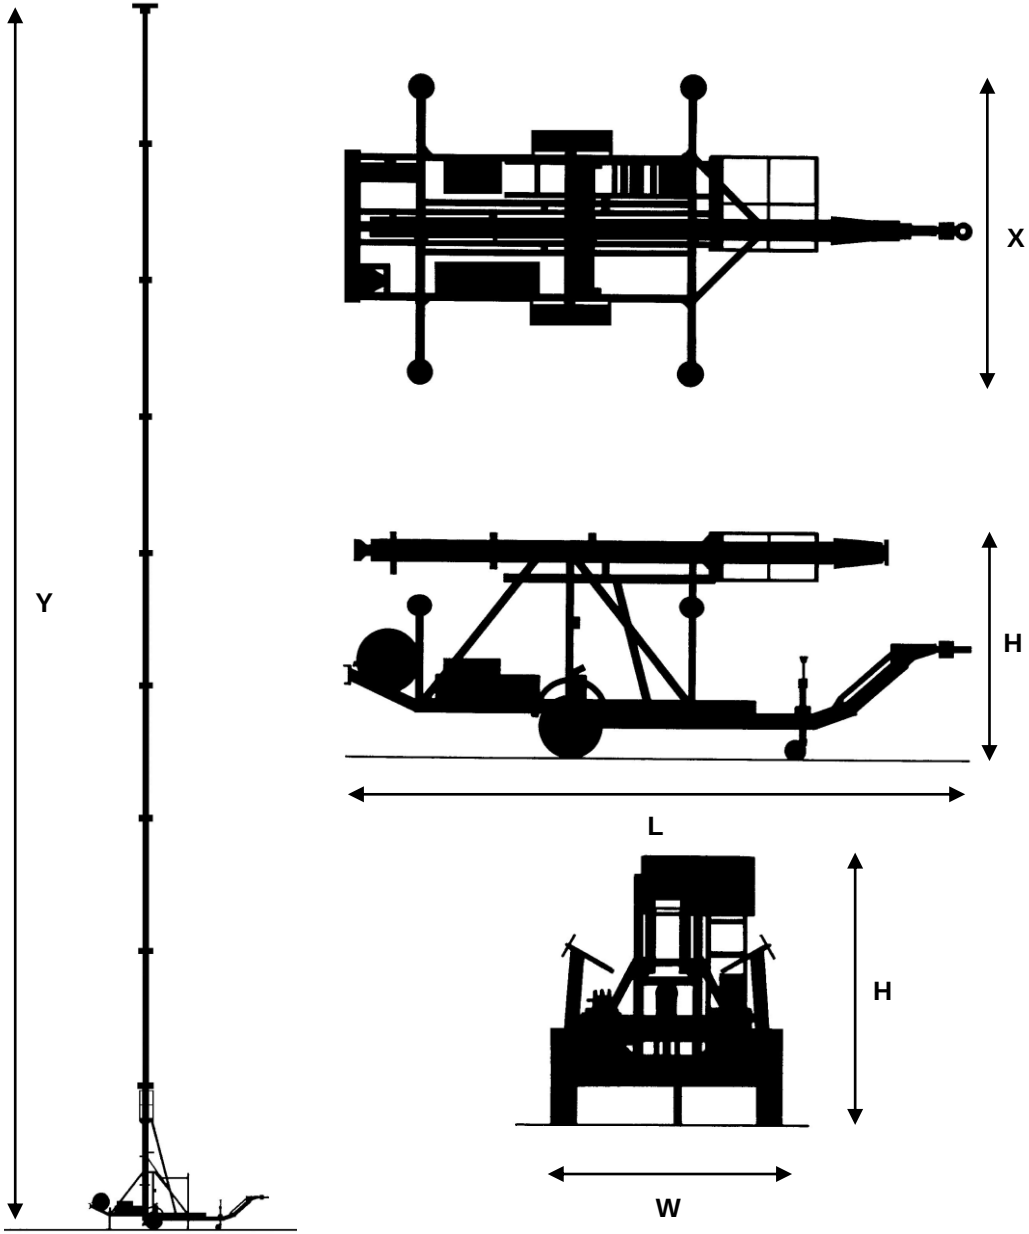

802/30-9 Trailer Mast

Cat. No.	49229
Mast	WT Series WT30-9-TC MIL STD 810F
Extended Height (Y)	30 m
Maximum Headload	15 kg
Length (L)	6.30 m Depending on Tow Bar Position
Width (W)	1.95 m
Height (H)	2.20 m
Maximum Weight (Loaded)	1300 (approx)
Width (X) Across Stabilisers	3.27 m
Tyres	R13 × 185 wide
Brakes	Ø200 mm mechanical, automatic on overrun and hand parking
Suspension	Rubber in torsion
Towing Hitch	50 mm ball coupling or NATO towing eye ø76 mm
Lighting	LED Lamps According to regulations, through a 13 pole connecting plug supplied fitted.
Standard Paint Colours	Any RAL colour. Telescoping tube sections – clear, green or gold anodised
Motor Compressor Unit	Engine – Petrol, 3.5 HP, 3600 rpm. Compressor – Clark PC200 litre/min free air Or DC 12/24v Clark Model 185
Maximum Working Air Pressure	25 psi
Mast Operating Temperature (Dry)	-40°C to +55°C
Guying Radius	18 m

CLARK MASTS SYSTEMS LTD., 18-20 Ringwood Road, Binstead, Isle of Wight, PO33 3PA, UK
Tel: +44 (0) 1983 563691/567090 Fax: +44 (0) 1983 566643/811157
E-mail: sales@clarkmasts.com Website: www.clarkmasts.com